N-SERIES PEMA ROLLERBED

N12 I IDLER UNIT

BASIC ROLLERBED, 6ton CAPACITY



Technical data

Max load (ton)	6
Rolling capacity (ton)	18
Diameter range min-max (mm)	250-5000
Roller diameter / total width (mm)	350 / 155
Rollers (pcs)	4
Roller material	PU
Width (mm)	400
Length (mm)	2840
Weight (kg)	580

Due to continuous R&D, Pemamek Ltd reserves the right to change the specification without notice.

PEMA N-SERIES ROLLERBEDS

PEMA N-series of conventional rollerbeds make up a range of basic solutions for rotating and handling a wide variety of cylindrical work-pieces. They occupy little space and feature a manual diameter adjustment arrangement. Loading capacities range between 12 and 1 600 tons.

PEMA N12 conventional idler rollerbeds are reliable, basic tools for rotating and moving cylindrical workpieces such as tubes, pressure vessels and tanks in automated welding. Thanks to their compact size, they occupy little space on shop floor. For smooth and effortless rotation, one or several idler units are usually combined with a powered drive unit.

In the N-series, roller distances are manually adjusted to accommodate varying work-piece diameters. N12 models feature quick and easy stepless manual diameter adjustment by means of a screw arrangement.

- Ideal for any cylindrical objects
- Even weight distribution
- Manual adjustment for different work-piece diameters
- PEMA rollerbeds fulfill the requirements of the European EN-safety norm
- All PEMA rollerbeds come with CE-markings

BETTER PRODUCTIVITY

A cost-effective way to improve productivity, welding quality and safety.

EASY INTEGRATION

Easy to integrate with other PEMA products like column & booms.

RELIABLE PRODUCTS


Designed and built for demanding machine shop environment.





N-SERIES PEMA ROLLERBED

N12 I IDLER UNIT

BASIC ROLLERBED, 6ton CAPACITY

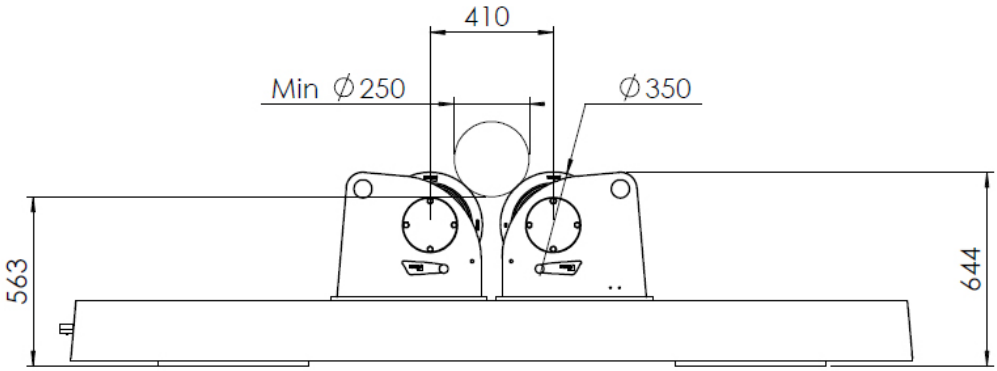

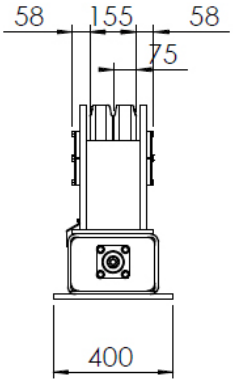

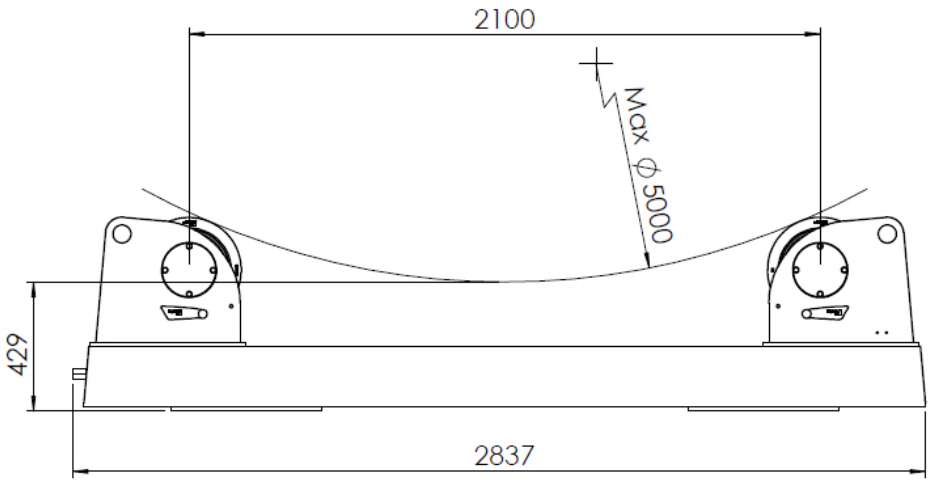

Optional accessories

- Rail car units

PEMAMEK LTD

Lamminkatu 47, FI-32200 Loimaa, Finland
Tel: +358 10 501 61
Email: info@pemamek.com www.pemamek.com